

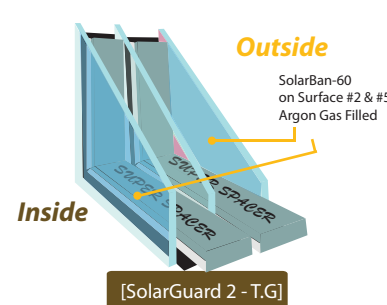


2630Series Legacy Fixed Windows

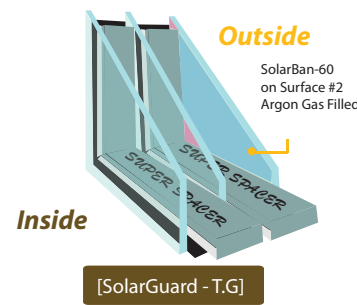




Model Code	Glass Thickness	Air Space	Low-E Surfaces	Grills	VT	U-Value Metric	R-Value Imperial	SHGC	Energy Ratings	Energy Star® Zone
<b>SolarGuard in Double Glaze [SolarBan-60/Clear Argon Filled]</b>										
2630FIX-GO1	3/3mm	1/2"	2	-	0.53	1.48	3.84	0.29	24	1
2630FIX-GO1	3/3mm	1/2"	2	5/16"	0.50	1.54	3.69	0.28	22	1
2630FIX-GO3	3/3mm	1/2"	2	5/8"	0.51	1.58	3.59	0.27	21	1
2630FIX-GO34	3/3mm	1/2"	2	SDL	0.48	1.55	3.66	0.26	21	1
<b>SolarGuard in Triple Glaze [SolarBan-60/Clear/Clear Argon Filled]</b>										
2630FIX-GO4	3/3/3mm	1/2"	2	-	0.49	1.17	4.85	0.27	30	1 2 3
2630FIX-GO5	3/3/3mm	1/2"	2	5/16"	0.46	1.20	4.73	0.26	29	1 2 3
2630FIX-GO6	3/3/3mm	1/2"	2	5/8"	0.50	1.21	4.69	0.25	28	1 2
2630FIX-GO7	4/4/4mm	7/16"	2	-	0.48	1.19	4.77	0.27	29	1 2 3
2630FIX-GO8	4/4/4mm	7/16"	2	5/16"	0.46	1.22	4.65	0.26	28	1 2
2630FIX-GO9	4/4/4mm	7/16"	2	5/8"	0.45	1.24	4.58	0.24	27	1 2
2630FIX-GO39	3/3/3mm	1/2"	2	SDL	0.44	1.20	4.73	0.23	27	1 2 3
<b>SolarGuard2 in Triple Glaze [SolarBan-60/Clear/SolarBan-60 Argon filled]</b>										
2630FIX-GO44	3/3/3mm	1/2"	2 & 5	-	0.45	0.90	6.31	0.25	35	1 2 3
2630FIX-GO45	3/3/3mm	1/2"	2 & 5	5/16"	0.51	0.93	6.11	0.24	34	1 2 3
2630FIX-GO46	3/3/3mm	1/2"	2 & 5	5/8"	0.49	0.96	5.91	0.23	32	1 2 3
2630FIX-GO47	3/3/3mm	1/2"	2 & 5	SDL	0.47	0.96	5.91	0.22	32	1 2 3
<b>SolarPlus in Double Glaze [Clear/Comfort E-PS Argon Filled]</b>										
2630FIX-GO16	3/3mm	1/2"	3	-	0.66	1.71	3.32	0.61	38	1 2 3
2630FIX-GO17	3/3mm	1/2"	3	5/16"	0.63	1.76	3.23	0.58	35	1 2 3
2630FIX-GO18	3/3mm	1/2"	3	5/8"	0.60	1.80	3.15	0.56	33	1 2
2630FIX-GO48	3/3mm	1/2"	3	SDL	0.49	1.71	3.32	0.47	30	1 2
<b>SolarPlus in Triple Glaze [Clear/Clear/Comfort E-PS Argon Filled]</b>										
2630FIX-GO25	3/3/3mm	1/2"	5	-	0.59	1.23	4.62	0.55	45	1 2 3
2630FIX-GO26	3/3/3mm	1/2"	5	5/16"	0.57	1.25	4.54	0.53	43	1 2 3
2630FIX-GO27	3/3/3mm	1/2"	5	5/8"	0.54	1.28	4.44	0.50	41	1 2 3
2630FIX-GO28	4/4/4mm	7/16"	5	-	0.60	1.27	4.47	0.54	43	1 2 3
2630FIX-GO29	4/4/4mm	7/16"	5	5/16"	0.57	1.29	4.40	0.52	41	1 2 3
2630FIX-GO30	4/4/4mm	7/16"	5	5/8"	0.55	1.32	4.30	0.49	40	1 2 3
2630FIX-GO49	3/3/3mm	1/2"	5	SDL	0.45	1.27	4.47	0.42	36	1 2 3
<b>SolarPlus2 in Triple Glaze [Comfort E-PS/Clear/Comfort E-PS Argon Filled]</b>										
2630FIX-GO50	3/3/3mm	1/2"	2 & 5	-	0.48	1.04	5.46	0.43	42	1 2 3
2630FIX-GO51	3/3/3mm	1/2"	2 & 5	5/16"	0.46	1.06	5.36	0.41	40	1 2 3
2630FIX-GO52	3/3/3mm	1/2"	2 & 5	5/8"	0.44	1.08	5.26	0.39	39	1 2 3
2630FIX-GO53	3/3/3mm	1/2"	2 & 5	SDL	0.41	1.08	5.26	0.37	38	1 2 3



2600 Series Legacy Casement Windows



Model Code	Glass Thickness	Air Space	Low-E Surfaces	Grills	VT	U-Value Metric	R-Value Imperial	SHGC	Energy Ratings	Energy Star® Zone
<b>SolarGuard in Double Glaze [SolarBan-60/Clear Argon Filled]</b>										
2600CAS-GO1	3/3mm	1/2"	2	-	0.47	1.49	3.81	0.25	21	1
2600CAS-GO2	3/3mm	1/2"	2	5/16"	0.45	1.53	3.71	0.24	20	1
2600CAS-GO3	3/3mm	1/2"	2	5/8"	0.43	1.56	3.64	0.23	19	1
2600CAS-GO34	3/3mm	1/2"	2	SDL	0.42	1.53	3.71	0.22	19	1
<b>SolarGuard in Triple Glaze [SolarBan-60/Clear/Clear Argon Filled]</b>										
2600CAS-GO4	3/3/3mm	1/2"	2	-	0.43	1.20	4.73	0.23	27	1 2 3
2600CAS-GO5	3/3/3mm	1/2"	2	5/16"	0.41	1.22	4.65	0.22	26	1 2
2600CAS-GO6	3/3/3mm	1/2"	2	5/8"	0.40	1.23	4.62	0.21	25	1 2
2600CAS-GO7	4/4/4mm	7/16"	2	-	0.43	1.22	4.65	0.23	26	1 2
2600CAS-GO8	4/4/4mm	7/16"	2	5/16"	0.41	1.24	4.58	0.22	25	1 2
2600CAS-GO9	4/4/4mm	7/16"	2	5/8"	0.39	1.26	4.51	0.21	24	1 2
2600CAS-GO39	3/3/3mm	1/2"	2	SDL	0.38	1.22	4.65	0.20	25	1 2
<b>SolarGuard2 in Triple Glaze [SolarBan-60/Clear/SolarBan-60 Argon filled]</b>										
2600CAS-GO44	3/3/3mm	1/2"	2 & 5	-	0.38	0.97	5.85	0.22	31	1 2 3
2600CAS-GO45	3/3/3mm	1/2"	2 & 5	5/16"	0.37	0.99	5.74	0.21	30	1 2 3
2600CAS-GO46	3/3/3mm	1/2"	2 & 5	5/8"	0.35	1.01	5.62	0.20	29	1 2 3
2600CAS-GO47	3/3/3mm	1/2"	2 & 5	SDL	0.33	1.01	5.62	0.19	29	1 2 3
<b>SolarPlus in Double Glaze [Clear/Comfort E-PS Argon Filled]</b>										
2600CAS-GO16	3/3mm	1/2"	3	-	0.49	1.64	3.46	0.45	30	1 2
2600CAS-GO17	3/3mm	1/2"	3	5/16"	0.47	1.68	3.38	0.44	28	1
2600CAS-GO18	3/3mm	1/2"	3	5/8"	0.45	1.71	3.32	0.42	27	1
2600CAS-GO48	3/3mm	1/2"	3	SDL	0.43	1.67	3.40	0.41	26	1
<b>SolarPlus in Triple Glaze [Clear/Clear/Comfort E-PS Argon Filled]</b>										
2600CAS-GO25	3/3/3mm	1/2"	5	-	0.53	1.25	4.54	0.49	41	1 2 3
2600CAS-GO26	3/3/3mm	1/2"	5	5/16"	0.50	1.27	4.47	0.47	39	1 2 3
2600CAS-GO27	3/3/3mm	1/2"	5	5/8"	0.48	1.29	4.40	0.44	37	1 2 3
2600CAS-GO28	4/4/4mm	7/16"	5	-	0.53	1.28	4.44	0.48	39	1 2 3
2600CAS-GO29	4/4/4mm	7/16"	5	5/16"	0.50	1.30	4.37	0.45	38	1 2 3
2600CAS-GO30	4/4/4mm	7/16"	5	5/8"	0.41	1.33	4.27	0.37	32	1 2
2600CAS-GO49	3/3/3mm	1/2"	5	SDL	0.38	1.28	4.44	0.36	32	1 2
<b>SolarPlus2 in Triple Glaze [Comfort E-PS/Clear/Comfort E-PS Argon Filled]</b>										
2600CAS-GO50	3/3/3mm	1/2"	2 & 5	-	0.41	1.08	5.26	0.36	37	1 2 3
2600CAS-GO51	3/3/3mm	1/2"	2 & 5	5/16"	0.39	1.10	5.16	0.35	36	1 2 3
2600CAS-GO52	3/3/3mm	1/2"	2 & 5	5/8"	0.37	1.11	5.12	0.38	37	1 2 3
2600CAS-GO53	3/3/3mm	1/2"	2 & 5	SDL	0.35	1.11	5.12	0.32	34	1 2 3

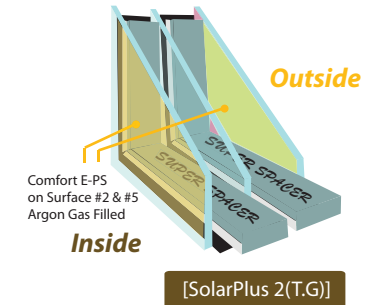

## 2600 Series Legacy Awning Windows



Model Code	Glass Thickness	Air Space	Low-E Surfaces	Grills	VT	U-Value Metric	R-Value Imperial	SHGC	Energy Ratings	Energy Star® Zone
<b>SolarGuard in Double Glaze [SolarBan-60/Clear Argon Filled]</b>										
2600AWN-GO1	3/3mm	1/2"	2	-	0.47	1.48	3.84	0.25	22	1
2600AWN-GO2	3/3mm	1/2"	2	5/16"	0.45	1.51	3.76	0.24	20	1
2600AWN-GO3	3/3mm	1/2"	2	5/8"	0.43	1.54	3.69	0.23	19	1
2600AWN-GO34	3/3mm	1/2"	2	SDL	0.42	1.51	3.76	0.22	19	1
<b>SolarGuard in Triple Glaze [SolarBan-60/Clear/Clear Argon Filled]</b>										
2600AWN-GO4	3/3/3mm	1/2"	2	-	0.43	1.19	4.77	0.23	27	1 2 3
2600AWN-GO5	3/3/3mm	1/2"	2	5/16"	0.41	1.20	4.73	0.22	26	1 2 3
2600AWN-GO6	3/3/3mm	1/2"	2	5/8"	0.40	1.21	4.69	0.21	26	1 2
2600AWN-GO7	4/4/4mm	7/16"	2	-	0.43	1.21	4.69	0.23	26	1 2
2600AWN-GO8	4/4/4mm	7/16"	2	5/16"	0.41	1.22	4.65	0.22	26	1 2
2600AWN-GO9	4/4/4mm	7/16"	2	5/8"	0.39	1.24	4.58	0.21	25	1 2
2600AWN-GO39	3/3/3mm	1/2"	2	SDL	0.38	1.19	4.77	0.20	25	1 2 3
<b>SolarGuard2 in Triple Glaze [SolarBan-60/Clear/SolarBan-60 Argon filled]</b>										
2600AWN-GO44	3/3/3mm	1/2"	2 & 5	-	0.38	0.95	5.98	0.22	31	1 2 3
2600AWN-GO45	3/3/3mm	1/2"	2 & 5	5/16"	0.37	0.97	5.85	0.21	31	1 2 3
2600AWN-GO46	3/3/3mm	1/2"	2 & 5	5/8"	0.35	0.99	5.74	0.20	30	1 2 3
2600AWN-GO47	3/3/3mm	1/2"	2 & 5	SDL	0.33	0.98	5.79	0.19	29	1 2 3
<b>SolarPlus in Double Glaze [Clear / Comfort E-PS Argon Filled]</b>										
2600AWN-GO16	3/3mm	1/2"	3	-	0.49	1.64	3.46	0.46	30	1 2
2600AWN-GO17	3/3mm	1/2"	3	5/16"	0.47	1.66	3.42	0.44	29	1 2
2600AWN-GO18	3/3mm	1/2"	3	5/8"	0.45	1.69	3.36	0.42	27	1
2600AWN-GO48	3/3mm	1/2"	3	SDL	0.43	1.59	3.57	0.41	28	1
<b>SolarPlus in Triple Glaze [Clear/Clear/Comfort E-PS Argon Filled]</b>										
2600AWN-GO25	3/3/3mm	1/2"	5	-	0.44	1.25	4.54	0.41	36	1 2 3
2600AWN-GO26	3/3/3mm	1/2"	5	5/16"	0.43	1.26	4.51	0.40	35	1 2 3
2600AWN-GO27	3/3/3mm	1/2"	5	5/8"	0.41	1.28	4.44	0.38	34	1 2 3
2600AWN-GO28	4/4/4mm	7/16"	5	-	0.45	1.29	4.40	0.40	35	1 2 3
2600AWN-GO29	4/4/4mm	7/16"	5	5/16"	0.43	1.30	4.37	0.39	34	1 2 3
2600AWN-GO30	4/4/4mm	7/16"	5	5/8"	0.41	1.31	4.33	0.37	33	1 2
2600AWN-GO49	3/3/3mm	1/2"	5	SDL	0.38	1.26	4.51	0.36	33	1 2
<b>SolarPlus2 in Triple Glaze [Comfort E-PS/Clear/Comfort E-PS Argon Filled]</b>										
2600AWN-GO50	3/3/3mm	1/2"	2 & 5	-	0.41	1.07	5.31	0.37	37	1 2 3
2600AWN-GO51	3/3/3mm	1/2"	2 & 5	5/16"	0.39	1.08	5.26	0.35	36	1 2 3
2600AWN-GO52	3/3/3mm	1/2"	2 & 5	5/8"	0.37	1.10	5.16	0.34	35	1 2 3
2600AWN-GO53	3/3/3mm	1/2"	2 & 5	SDL	0.35	1.09	5.21	0.32	34	1 2 3




## LEGEND

Standard: CSA A440.2 "Energy Performance of Windows"  
 Glass Thickness allowed within a range of ±1.3mm  
 VT: Visual Transmittance (0 to 0.99)  
 SHGC: Solar Heat Gain Coefficient (0 to 0.99)



**Supreme Windows (Calgary) Inc.**  
 4705-102 Ave. S.E., Calgary, Alberta, T2C 2X7  
 Tel. (403) 279-2797 / Fax. (403) 236-1681

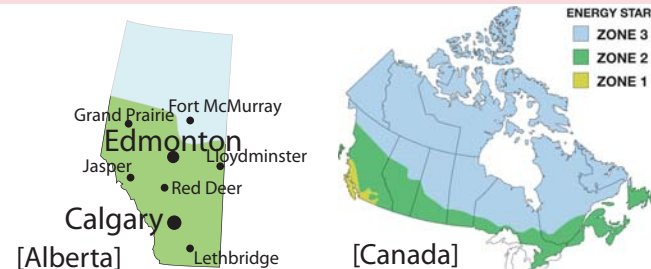

Feb. 1, 2015

ENERGY STAR® RATINGS  
LEGACY SERIES VINYL WINDOWS

## 2545 Series Legacy Picture Windows

Model Code	Glass Thickness	Air Space	Low-E Surfaces	Grills	VT	U-Value Metric	R-Value Imperial	SHGC	Energy Ratings	Energy Star® Zone
<b>SolarGuard in Double Glaze [SolarBan-60/Clear Argon Filled]</b>										
2545PIC-GO1	3/3mm	1/2"	2	-	0.63	1.50	3.79	0.33	25	1
2545PIC-GO2	3/3mm	1/2"	2	5/16"	0.60	1.56	3.64	0.32	24	1
2545PIC-GO3	3/3mm	1/2"	2	5/8"	0.58	1.60	3.55	0.31	22	1
2545PIC-GO34	3/3mm	1/2"	2	SDL	0.55	1.56	3.64	0.29	23	1
<b>SolarGuard in Triple Glaze [SolarBan-60/Clear/Clear Argon Filled]</b>										
2545PIC-GO4	3/3/3mm	1/2"	2	-	0.58	1.15	4.94	0.31	33	1 2 3
2545PIC-GO5	3/3/3mm	1/2"	2	5/16"	0.55	1.18	4.81	0.29	31	1 2 3
2545PIC-GO6	3/3/3mm	1/2"	2	5/8"	0.53	1.19	4.77	0.28	30	1 2 3
2545PIC-GO7	4/4/4mm	7/16"	2	-	0.57	1.17	4.85	0.30	32	1 2 3
2545PIC-GO8	4/4/4mm	7/16"	2	5/16"	0.55	1.20	4.73	0.29	30	1 2 3
2545PIC-GO9	4/4/4mm	7/16"	2	5/8"	0.52	1.22	4.65	0.28	29	1 2
2545PIC-GO39	3/3/3mm	1/2"	2	SDL	0.50	1.18	4.81	0.27	30	1 2 3
<b>SolarGuard2 in Triple Glaze [SolarBan-60/Clear/SolarBan-60 Argon filled]</b>										
2545PIC-GO44	3/3/3mm	1/2"	2 & 5	-	0.51	0.84	6.76	0.29	38	1 2 3
2545PIC-GO45	3/3/3mm	1/2"	2 & 5	5/16"	0.49	0.87	6.53	0.27	37	1 2 3
2545PIC-GO46	3/3/3mm	1/2"	2 & 5	5/8"	0.47	0.90	6.31	0.26	35	1 2 3
2545PIC-GO47	3/3/3mm	1/2"	2 & 5	SDL	0.44	0.90	6.31	0.25	35	1 2 3
<b>SolarPlus in Double Glaze [Clear/Comfort E-PS Argon Filled]</b>										
2545PIC-GO16	3/3mm	1/2"	3	-	0.58	1.67	3.40	0.54	34	1 2 3
2545PIC-GO17	3/3mm	1/2"	3	5/16"	0.55	1.72	3.30	0.51	32	1 2
2545PIC-GO18	3/3mm	1/2"	3	5/8"	0.53	1.75	3.24	0.49	30	1 2
2545PIC-GO48	3/3mm	1/2"	3	SDL	0.56	1.75	3.24	0.53	33	1 2
<b>SolarPlus in Triple Glaze [Clear/Clear/Comfort E-PS Argon Filled]</b>										
2545PIC-GO25	3/3/3mm	1/2"	5	-	0.53	1.25	4.54	0.49	41	1 2 3
2545PIC-GO26	3/3/3mm	1/2"	5	5/16"	0.50	1.27	4.47	0.47	39	1 2 3
2545PIC-GO27	3/3/3mm	1/2"	5	5/8"	0.48	1.29	4.40	0.44	37	1 2 3
2545PIC-GO28	4/4/4mm	7/16"	5	-	0.53	1.28	4.44	0.48	39	1 2 3
2545PIC-GO29	4/4/4mm	7/16"	5	5/16"	0.50	1.30	4.37	0.45	38	1 2 3
2545PIC-GO30	4/4/4mm	7/16"	5	5/8"	0.41	1.33	4.27	0.37	32	1 2
2545PIC-GO49	3/3/3mm	1/2"	5	SDL	0.51	1.26	4.51	0.47	40	1 2 3
<b>SolarPlus2 in Triple Glaze [Comfort E-PS/Clear/Comfort E-PS Argon Filled]</b>										
2545PIC-GO50	3/3/3mm	1/2"	2 & 5	-	0.54	1.00	5.68	0.49	46	1 2 3
2545PIC-GO51	3/3/3mm	1/2"	2 & 5	5/16"	0.52	1.02	5.57	0.46	44	1 2 3
2545PIC-GO52	3/3/3mm	1/2"	2 & 5	5/8"	0.50	1.05	5.41	0.44	43	1 2 3
2545PIC-GO53	3/3/3mm	1/2"	2 & 5	SDL	0.47	1.04	5.46	0.42	42	1 2 3